

Features:

Comfy outdoor wall recessed light.
 Housing: Die-cast aluminum body, Matt White/Grey/ Matt black/Chrome.
 Embedded part: ABS recessed parts included.
 High light Transmissivity.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.
 Wattage : 3W
 High Lumen : 100lm/w
 4 STEP Mac Adam
 Isolated constant current driver
 Lamp Type : SMD
 Operating Temperature: -25°C to 60°C
 Glow Wire Test 850° C
 Warranty : 5 Years
 Life Time : 50,000hrs at ta 35°C

Fields of Application:


Outdoor building
 Steps
 Plazas
 Indoor place

Installation Method:


Recessed

Wattage(W)	:	3
Finish	:	Matt White/Grey Matt black/Chrome
Kelvin	:	3000K 4000K 6500K
Beam Angle	:	30° 60° 120°
CRI	:	80
Driver	:	ON/OFF 0/1-10V DALI

Product Parameter:

Product Code	Wattage	Lumens(lm)	Dimension(L X W X H)	Cut out 
96308603	3	300LM	86 x 86 x 45	80X 80 X51

Photometric:

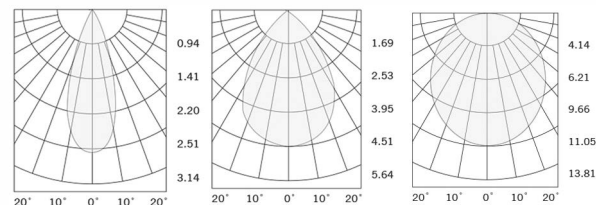

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 55015

Additional Option:

- Low voltage DC12V/DC24V/DC48V
- Photocell (Dusk to Dawn)
- PIR/Motion Sensor