


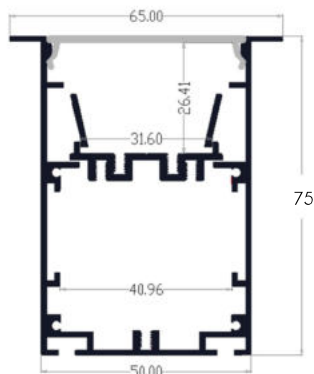

Description:

Simple and easy appearance, in line with contemporary aesthetic concept.
Linear extruded 6063-T5 Aluminium alloy.
Matt surface treatment.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.
Wattage : 20 - 50W
High Lumen : 120lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type : Module
Diffuser: Opal Pc / Frosted
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time : 50,000hrs at ta 25°C (L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants
Healthcare

Installation Method:

Recessed

Parameter:

Wattage	:	20	30	40	50		
Finish	:	☐ White(W)	☒ Black(B)	☐ Silver(S)			
Kelvin*	:	3000K	3500K	4000K	5000K	6500K	Tunable
Beam Angle	:	120°					
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Bluetooth		


*Special Colour & Finish on Request.

Product Chart:

Product Code	Wattage	Lumens(lm)*
964507520R	20	2400LM
964507530R	30	3600LM
964507540R	40	4800LM
964507550R	50	6000LM

*Luminous flux value is calculated for 4000K & CRI>80

Photometric:




Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 55015

Seamless Connection:

180°connector & 90° connector-

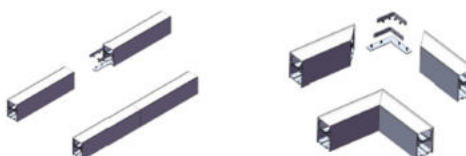

Accessories:

End Cap Bracket

