


TEXA

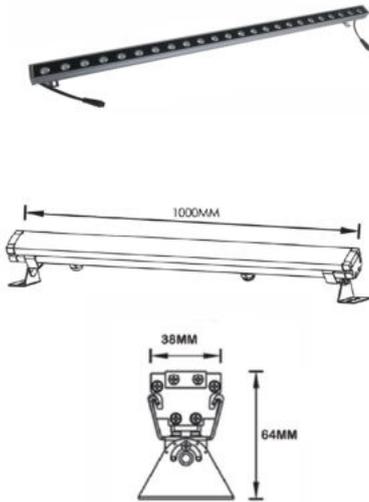

Description:

TEXA outdoor linear wall washers are lighting fixtures designed to provide uniform illumination along the length of a wall or other vertical surfaces. It includes features such as corrosion resistance, dustproof, anodized and polished, sandblasted, not easy to rust & fade. Toughened glass surface, with high hardness, not easy to break. It comes with different CCT and R/G/B LED sources & various beam angles; this family is a perfect solution to the requirement. High-brightness high-quality LED, high lumen, low light loss, long light source life. They are commonly used in architectural lighting to enhance the aesthetics of buildings, highlight textures, and create visually appealing lighting effects.

Product Specification:

Housing: Die cast aluminum
 Coating: Powder Coating
 Front cover: Tempered glass grey print
 Gasket: Molding shaped silicone seal
 Lens/Reflector: Optical lens
 Power Cable: 0.5 mt. power cable included
 Driver: High efficiency, low flicker driver
 Installation Type: Surface
 Warranty: 5 Years

Technical Specification:

Wattage: 24 - 48W
 Voltage: DC24V / 220-240V AC
 Frequency: 50-60Hz
 Light Source: LED
 Lumen: 100lm/W
 Mac Adam: 3 Step
 Safety Class: III / II
 Working Temperature: -20°C to 55°C
 Life Time: 50,000hrs (L80/B10) at 35°C

Parameter:

Wattage	:	24W/ 48W
Finish	:	Grey (G) / Customized(C)
Kelvin*	:	3000K / 4000K / 6000K / RGB / RGBW
Beam Angle	:	10° / 20° / 30° / 40° / 60° / Symmetric / Asymmetric
CRI	:	80
Driver	:	ON/OFF / 0/1-10V / Phase cut / DALI / DMX

*Special Colour & Finish on Request.


Product Chart:

Product Code	Wattage	Lumens(lm)*	Dimension(LxWxH)
862684560	24	2400LM	1000x38x32 mm
862684560	48	3800LM	1000x38x32 mm

*Luminous flux value is calculated for 4000K & CRI>80.

*Above mentioned standard wattages can be customized according to designed LUX requirement.

Photometric:

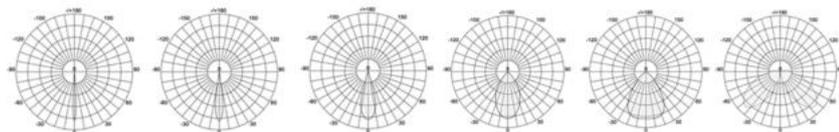

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 55015

Order Code Ex:	862684560	30K	60D	8	1	G	AC
Product Code	862684560	CCT	Beam Angle	CRI	Driver	Finish	Volatge
		30K-3000K	100-10°	8-80	1-ON-OFF	G-Grey	DC-24VDC
		40K-4000K	200-20°		2-0/1-10V	C-Customized	AC-220-240VAC
		60K-6000K	350-30°		3-Phase cut		
		RGB	400-40°		4-DALI		
		RGBW	600-60°		5-DMX		
			S-Symmetric				
			A-Asymmetric				

Pluxb luminaires are developed with globally recognised and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.